


# AVS-315+ PLUS

## INTEGRATED PROJECTOR CONTROLLER SWITCHER

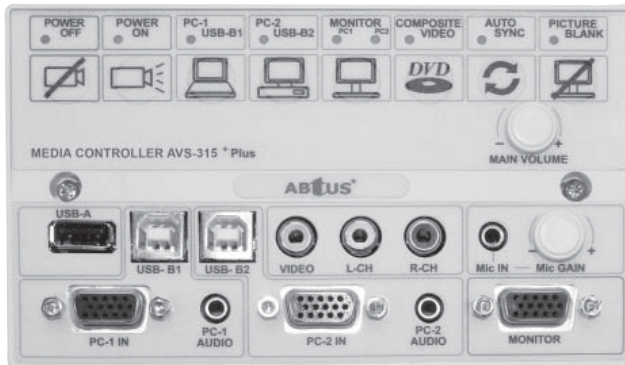


### DESCRIPTION

The ABtUS 315 plus Media Control Panel is one of the most user friendly and installer friendly, preprogrammed controller specifically designed for a easy and central control of any AV projection system with interactive through USB. It removes the need for over-complicated and multiple remote control handsets. With the 2:1 USB-B switcher, switcher for projection with interactive can now be done with just a push of a button.

### FEATURES

- Simple to used with one to one function controlled button
- Works well with any monitors, projectors as well as interactive system
- Supports 2x2 VGA matrix switching
- Easy Installation with standard 2.54mm connector and cabling
- Fully self contained / integrated Projector Controller with AV switcher
- Build in USB buffer with best connective for interactive system and USB thumb drive

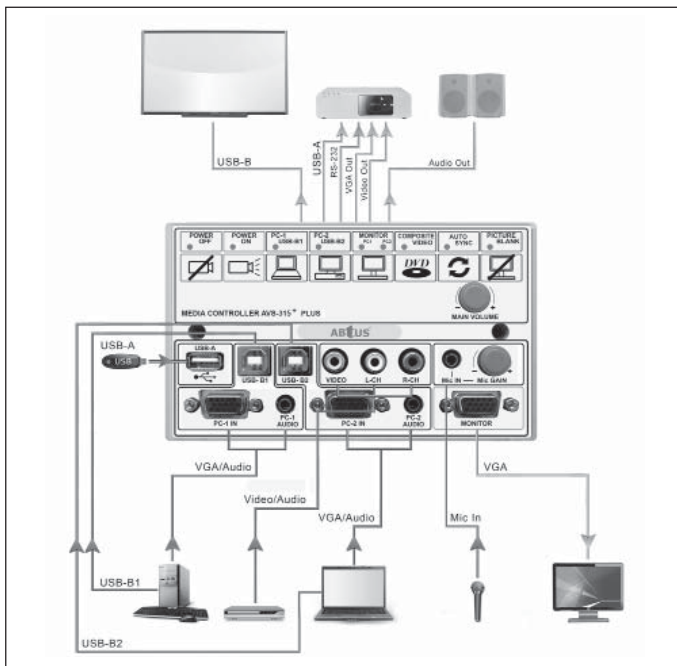

### TYPICAL APPLICATIONS

Any professional presentation system requiring multiple AV Inputs of all different type of Video standard and a standard projector controller.

- Schools (Media Classroom) • Churches • Corporate Applications (Meeting Room)

### TECHNICAL SPECIFICATION

<b>INPUT:</b>	VGA Input x 2 (*D-Sub 15pin)
	PC-Audio x 2 (*3.5mm)
	C-Video x 1 (*RCA)
	Stereo Audio x 1 (*RCA)
	Microphone x 1 (*3.5mm)
	USB-B x 2 (Switcher with build in buffer)
	USB-A x 1 (for Thumb Drive with build in buffer)
<b>OUTPUT:</b>	1 x VGA [*standard 2.54mm connector for Projector]
	1 x VGA output [*D-Sub 15pin for monitor]
	1 x C-Video [*standard 2.54mm connector]
	1 x Main Stereo Audio [*standard 2.54mm connector]
	1 x Tx [*standard 2.54mm connector]
	USB-B x 1
	USB-A x 1

**VGA BANDWIDTH:** 2x2 VGA Matrix Switching  
900MHz (R+G+B)

**MAX RESOLUTION:** 1280 x 1024

**ALL CABLE LENGTH:** Up to 28 meter

**CONFIGURABLE:** 1 x RS-232 (8 Data Bit and 1 Stop Bit)

**COM PORT:** Baud Rate (1200 to 115200)  
Parity Bit (Non, Even or Odd)

**DELAY TIME:** Projector "ON/OFF" delay time [\*in sec] 1 to 99

**CONTROL BUTTON:** Number of user defined "Control Button" x 8

Available protocol for each "Control Button" x 1

With LED indication and buzzer for confirmation

**LED:** All Video/VGA/USB Input Switching Digital

**AUDIO SELECTION:** Audio Input Switching Digital

**VOLUME:** Main Volume Control Analog

**MIC GAIN:** Microphone Input Gain Control Analog

**POWER ADAPTOR:** 12V-DC, 500mA

**HOUSING:** ABS Enclose

**DIMENSIONS:** 149 x 88 x 48 mm

**WEIGHT:** 350g

\* Specifications are subject to change without notice.

**ABtUS**